




# ALTIQ™ ROCK LIGHT PRO

## INSTALLATION INSTRUCTIONS

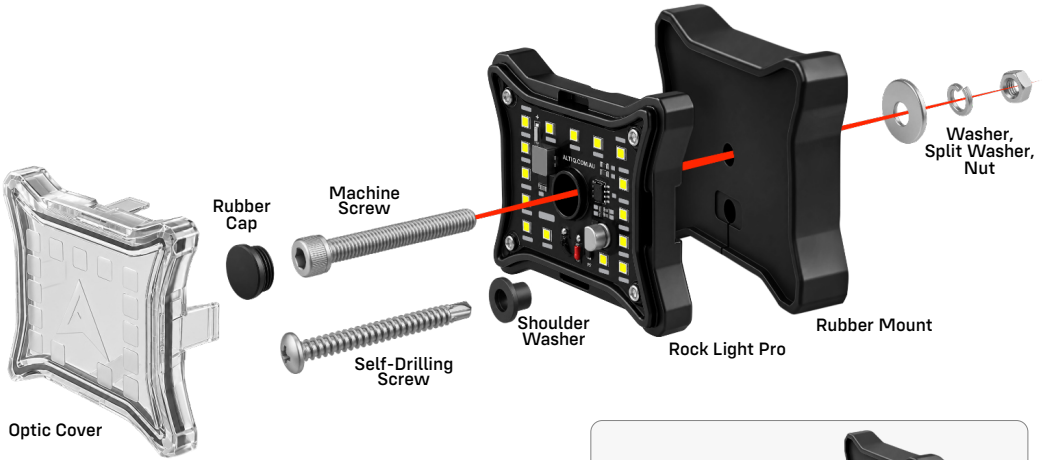

Optic Cover

Rubber Cap

Machine Screw

Self-Drilling Screw

Shoulder Washer

Rock Light Pro

Rubber Mount

Washer, Split Washer, Nut

### ▲ Note

**Do Not Overtighten Screw:** Max 15nm torque.

30° Rubber Mount available separately.



### Keyed Connectors

The Waterproof Connector is keyed and only inserts one way. Align the connector before pushing it in, then thread the waterproof collar until locked.



### Wire Routing

The Rubber Mount allows for flexible wire mounting.

Choose from Rear Exit (left) or Surface Mount (right).




# SUGGESTED WIRING SETUPS

## Option 1: Existing or New Circuit


Each Rock Light Pro includes a bare-wire pigtail after the waterproof connector for direct connection to a **fused 10-30V** DC power source.

### Suitable for:

- New accessory circuits
- Existing accessory circuits
- Switch panels
- Fuse blocks

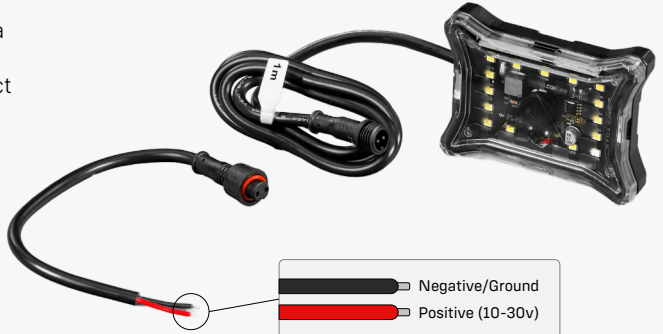

## Option 2: 10 Output Harness Kit

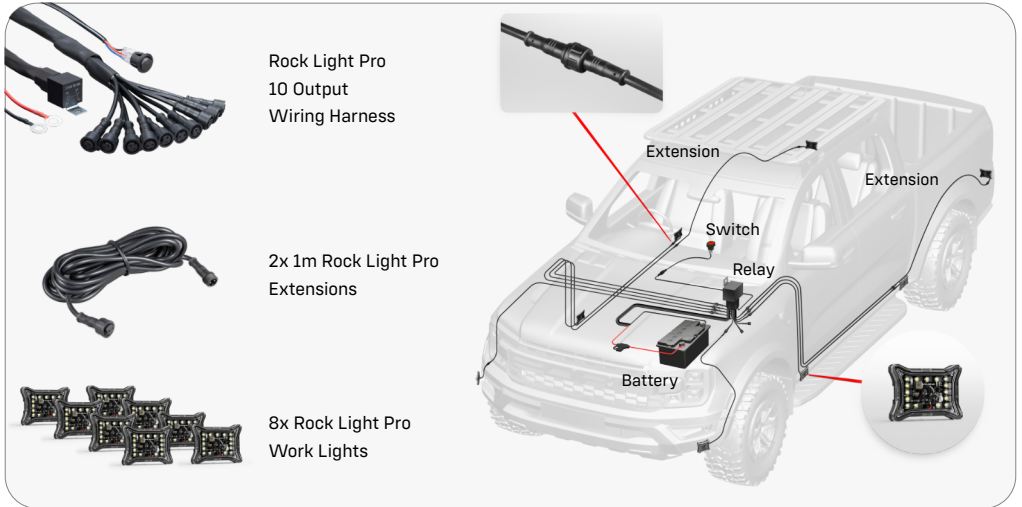

### Rock Light Pro Specifications

Voltage	10-30v
Amps	0.7a @ 12v
Power Draw	8.7w
Wire Gauge	20awg